


UNIQUE DESIGN PALLET TRUCK

Perfect fluent outline of GiGA26 has many international and domestic patents.

Key components imported from Germany with best reliable quality, piston rod chrome plated with high wear resistance.

- Over-load protection valve enhances safety of the cargos and operator as well.
- Automatic slow-lowering system ensures the safety of the cargos, especially fragile cargos.
- Single-piece hydraulic valve cartridge has more advantages than scattered components such as easy maintenance, which is more preferred by the market.
- Rotating joints are equipped with Engineering Plastic Sliding Bearing, able to absorb eccentric load, with better wear resistance, extended using life and easy replacement.

Hand pallet truck		1KG=2.2LB 1INCH=25.4MM	
TECHNICAL DATA		GiGA26	
Load capacity	Q	Kg	2600
Dead weight		Kg	80kg(PU roller) or 76kg(Nylon roller)
Standard fork length	l	Kg	1150
Load centre distance	c	mm	600
Total length	L	mm	1540
Steering Wheels	diameter	mm	200 x 50
Tandem rollers		mm	80 x 70
Turning radius	Wa	mm	1335
Aisle width	A	mm	1790
Width over forks	b5	mm	540 / 685
Fork width	e	mm	160
Lowered height	h13	mm	85
Lifting height	h3	mm	200

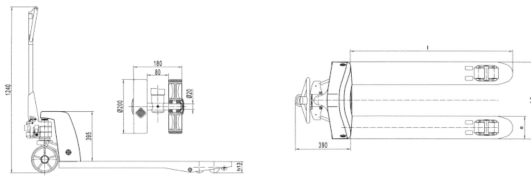

- Ergonomically designed handle with comfortable rubber grip allows the optimized safety as well as comfortable.
- Lower Position—to lower load, pull up on the finger tip control
- Neutral Position—to place finger tip control in this position during pulling the truck or load.
- Lift Position—to raise load, push down on finger tip control, pump handle to raise the load.
- Excellent galvanized whole casting hydraulic pump, robust and durable, with fine control of lowering speed and overload valve, low routine maintenance.